
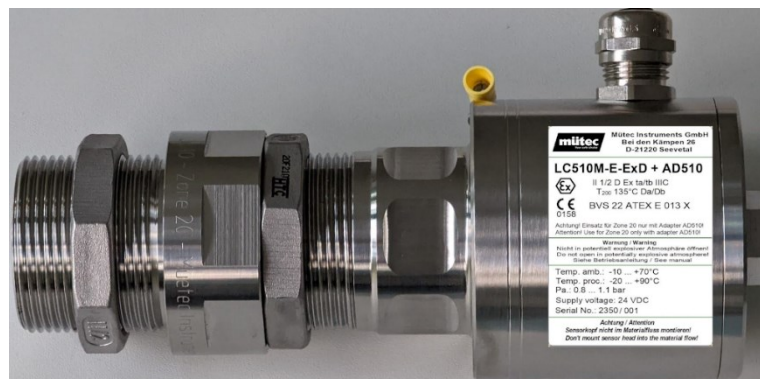


Operating instructions

LC510M-S-ExD and LC510M-E-ExD

Microwave sender and microwave receiver for point detection

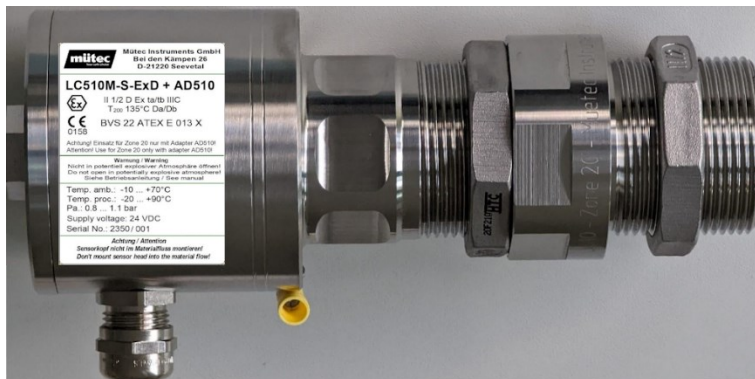

The microwave sensors (sender and receiver) fulfill the dust explosion protection standard for type of protection "t" - protection by enclosure.
EU type examination certificate: BVS 22 ATEX E 013 X

Operating instructions for:

LC510M-S-ExD (microwave sender in dust Ex version)

LC510M-S (microwave sender in non-dust Ex version)

LC510M-E-ExD (microwave receiver in dust Ex version)

LC510M-E (microwave receiver in non-dust Ex version)

Publication no.: 320

Issue date: 2/2024

Manufacturer:

Mütec Instruments GmbH
Bei den Kämpfen 26
21220 Seevetal
Germany

Tel: +49 (0) 4185 8083-0

Fax: +49 (0) 4185 808380

e-mail: info@muetec.de

Internet: www.muetec.de

Copyright © 2024 Mütec Instruments GmbH

This document is protected by copyright. It supports the user in the safe and efficient use of the device. This document may not be passed on or reproduced, nor may its contents be utilized or communicated, unless expressly permitted. Infringements will result in compensation for damages. All rights reserved.

Disclaimer

We have checked the contents of this publication for conformity with the hardware described. However, deviations cannot be ruled out, so we cannot guarantee complete conformity. The information in this publication is checked on a regular basis. Corrections and additions will be made in the following version. We are grateful for any suggestions for improvement.

Subject to technical changes

Use

The microwave barrier (LC = Level Check) LC510M-S-ExD and LC510M-E-ExD is used for level detection of bulk solids and liquids in silos, storage bunkers and crushers or in pipes and containers. Due to the non-contact measuring method, a wear-free and maintenance-free continuous operation is possible. The microwave measuring system, which is housed in two separate flanged housings and consists of the sender and receiver units, does not need to be electrically interconnected.

The microwave emitted from the sender to the receiver serves as a signal barrier, e.g. for fill level monitoring in a silo. At a maximum fill level, the microwave transmission path is interrupted by the accumulation of material. The evaluation electronics in the receiver unit detects this condition and sends a message to the outside via the relay contact. To monitor a minimum fill level in the silo, the function sequence is reversed because the microwave transmission path is only enabled again after a material outflow. The relay contact in the receiver sensor is controlled in accordance with the parameterization.

Both sensors are equipped with active self-monitoring. A relay, which is operated on the closed-circuit principle, is available to signal a maintenance requirement. The relay contact, which is closed in the good state, offers the option of series connection with other contacts of other devices and thus monitoring in the form of a collective alarm.

Performance features

- Microwave system
- Reliable measurement
- Point level detection in open or closed systems
- Simple installation and commissioning
- Microwave sensors with self-monitoring
- Signal message via relay contact
- Additional relay contact output for the maintenance requirement request
- 24VDC supply

Table of contents

1	Safety instructions	.5
2	Classification of the safety instructions	.5
3	General information	.6
4	ATEX-relevant information	.7
5	Technical data	10
5.1	Electrical data	10
5.2	Thermal data	10
5.3	Mechanical data	10
5.4	Electrostatic discharge	10
5.5	Housing dimensions with adapter	11
5.6	AD510 adapter	11
5.7	Earthing using PE protective earth conductor	11
5.8	Block diagram with the terminal assignment	12
5.9	Nameplates	13
5.10	Screw cap of the sensor housing	13
5.11	Mounting accessories	14
6	Installation instructions	14
7	Parameterization of the sensor	15

1 Safety instructions



Installation, operation and maintenance may only be carried out by qualified personnel.



The circuits in the appliance must not be accessed.

Do not repair the appliance itself, but replace it with an equivalent appliance.



The appliance complies with type of protection "t" and can be installed in zone 21.
An adapter (AD510) must be screwed on for measurements in Zone 20.

2 Classification of the safety instructions

This manual contains instructions that you must observe for your personal safety and to prevent damage to property. The instructions are highlighted by a warning triangle and shown as follows, depending on the degree of danger:



DANGER

means that death or serious bodily injury will occur, if the appropriate precautions are not taken.



WARNING

means that death or serious bodily injury may occur, if the appropriate precautions are not taken.



CAUTION

means that slight bodily injury can occur if the appropriate precautions are not taken.

CAUTION

without a warning triangle means that material damage may occur, if the appropriate precautions are not taken.



ATTENTION

means that an undesirable result or condition may occur, if the corresponding notice is not observed.



NOTE

is important information about the product, the handling of the product or the part of the documentation to which particular attention is drawn. and compliance with which is recommended.

In addition to the instructions in this publication, the generally applicable safety and operating instructions and accident prevention regulations must be observed. If in any case the information contained in this publication is not sufficient, our telephone service is available to provide you with further information. Please read this document carefully before installation and commissioning.

3 **General information**

This appliance has left the factory in a technically safe condition. In order to maintain this condition and to ensure safe operation of the appliance, the instructions and warnings given in these operating instructions must be observed by the user.

ATTENTION

For reasons of clarity, the instructions do not contain all detailed information on all types of the product and cannot take into account every conceivable case of installation, operation or maintenance.

Should you require further information, or should particular problems arise that are not covered in sufficient detail in the instructions, you can request the necessary information by telephone.

Furthermore, we would like to point out that the contents of the instructions are not part of a previous or existing agreement, promise or legal relationship or are intended to change these. All obligations of Mütec Instruments GmbH arise from the purchase contract, which also contains the complete and solely valid warranty provisions. These contractual warranty provisions are neither extended nor limited by the statements in this technical manual.

The content reflects the technical status at the time of printing. We reserve the right to make technical changes in the course of further development.

WARNING

Proper and safe operation of this microwave sensor requires proper transportation, storage, installation, assembly and maintenance. The microwave sensor may only be for the purpose specified in these operating instructions.

DISCLAIMER

All modifications to the appliance, unless expressly mentioned and approved in the operating instructions, are the responsibility of the user.

VALIDITY



The operating instructions apply both to the LC510M-S-ExD and LC510M-E-ExD microwave sensors described and to the LC510M-S/E non-dust Ex sensors, for which the AD510 adapter is not relevant and can therefore be omitted.

TARGET GROUP

This data sheet is intended for the following persons:

- Qualified personnel who plan and install safety equipment for machines and systems. Developed and familiar with the regulations on occupational safety and accident prevention.
- Qualified personnel who install safety equipment for machines and systems and puts it into operation.

QUALIFIED PERSONNEL

Qualified personnel are persons who, due to their training, experience and instruction as well as their knowledge of relevant standards, regulations, accident prevention regulations and operating conditions, have been authorized by the person responsible for the safety of the system to carry out the necessary planning and activities and are able to recognize and avoid potential hazards.

PREREQUISITES

The qualified personnel must have knowledge of the following subject areas:

- Handling and knowledge of ATEX products
- Applicable EMC regulations
- Applicable regulations on occupational safety and accident prevention
- Placement or assembly of an ATEX product
- Commissioning, monitoring and maintenance of an ATEX product

SAFETY REGULATIONS

The safety regulations of the electrical engineering and the employers' liability insurance association must be observed and complied with. Failure to do so may result in death, serious injury or severe damage to property.

DIRECT/INDIRECT TOUCH

For all components connected to the system, protection against direct and indirect contact in accordance with VDE 0100 Part 410 needs to be given. In the event of a fault, there must be no dangerous voltage carry-over (single-fault safety).

ASSEMBLY and COMMISSIONING

Installation and commissioning may only be carried out by qualified personnel. The wiring must be carried out and tested in accordance with the specifications (see block diagram). Separate cable routing for the 24 VDC supply on the one hand and the relay power supply on the other must be ensured, it can counteract EMC influences.

Suitable/effective protective circuits are required for inductive loads on the relay circuits.

A protective circuit with suppressor diodes or varistors must always be connected in parallel to the load.

EXTERNAL OPERATION and DISPOSAL

The device must be disposed of in accordance with environmental regulations. It must be ensured, that a defective device will not be used again.

4 ATEX-relevant information

An appliance must be taken out of operation and unintentional operation prevented if it can be assumed that safe operation is no longer possible. Reasons for this assumption may be

- Visible damage
- Failure of the electrical function
- Longer storage at temperatures above 75 °C
- Heavy transportation stress

Before the appliance is put back into operation, a professional routine test must be carried out. This test should always be carried out by the manufacturer. Repair work on Ex devices may only be carried out in accordance with §9 of the Ex Ordinance (Elex V).

When installing in a partition wall between 2 dust Ex zones (e.g. zone 21 and zone 22), the zone separation must not be removed by installing the appliance. This requirement must be ensured by appropriate sealing and preventing unscrewing during operation. The lock nuts available for this purpose on the microwave sensor and the adapter with the SW56 must be tightened with an appropriate torque. Installation and erection must be carried out in accordance with DIN EN 60079-14.

Instructions for opening/closing the housing cover:

- Never open in a dust atmosphere during operation
- Close the housing cover with a wrench (SW22) (see section 5.10)
- A tightening torque of 8 ... 10 Nm reliably prevents opening by hand!

Special conditions of use (X marking)



The process connection of the microwave sensor must be installed protected from UV radiation in open applications (e.g. on conveyor belts).

The temperature at the cable entry points rises to up to 74°C if the ambient temperature rises to 70°C. Approved temperature-resistant cables must be used



The permissible ambient temperature range is -10°C to +70°C and must not be exceeded or fallen short of.

The permissible process temperature range is -20°C to +90°C and must not be exceeded or fallen short of.

The permissible pressure range of 0.8 bar to 1.1 bar must be observed and must not be exceeded or fallen short of.

The normal oxygen content of air of usually 21 % (V/V) should be maintained.



The LC510M-S-ExD and LC510M-E-ExD microwave sensors are designed for use/measurement in Zone 21 permitted

Only with the AD510 adapter screwed on measurement they are also permitted in Zone 20.

Example of marking in accordance with Directive 2014/34/EU and EN 60079-0:2018 for a dust-explosion-proof device:

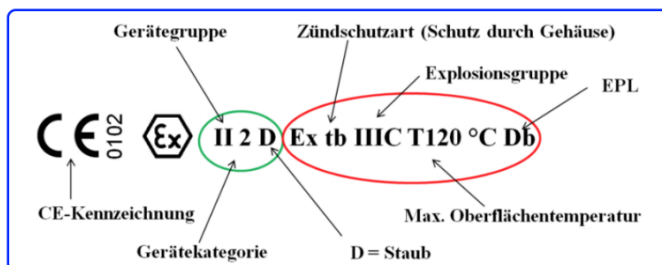


Fig. 1 Identification of a Dust Ex device

Marking on the type plate in accordance with Directive 2014/34/EU for use in the dust Ex area:

	Explosionssgeschützt
II	Gerätegruppe: Ex-Geräte, die nicht in Bergwerken etc. eingesetzt werden
1/2	Gerätekategorie: sehr hohes Maß/hohes Maß an Sicherheit (Gerät mit Trennwand)
D	Art der Ex-Atmosphäre: Staub
Kennzeichnung der Zündschutzart:	
Ex	Explosionsschutz nach EN
ta/tb	Zündschutzart: Schutz durch Gehäuse, inkl. Schutzniveau ta/tb (Gerät mit Trennwand)
IIIC	Staubgruppe: leitfähige Stäube
T135°C	Maximale Oberflächentemperatur: 135°C
Da/Db	EPL (Equipment Protection Level): sehr hohes/hohes Schutzniveau (Staub)

CE mark: This product complies with the specifications of the EMC Directive 2014/30/EU and the ATEX Directive 2014/34/EU.

Maintenance and inspection

The microwave sensor is a maintenance-free product for material flow monitoring when the material flow parameters specified in the instructions for correct installation are observed.

An exception could be the measurement of a more or less abrasive material in pipelines, because the orifice plate would then be subject to a certain amount of wear. It is therefore recommended to carry out an inspection at limited intervals, which can be confirmed by a photo and should be documented. A possible consultation with the manufacturer can thus be ideally be supported.

5 Technical data

Ex certificate	BVS 22 ATEX E 013 X	
	II 1/2D Ex ta/tb IIIC T ₂₀₀ 135°C Da/Db or II 2D Ex tb IIIC T135°C Db	
Conformity	EN IEC 60079-0:2018 EN 60079-31:2014	General requirements Protection by enclosure "t"

5.1 Electrical data

Supply circuit (KL1 and KL2)			
Voltage		DC 18...30	V
Amperage		80	mA
Max. Max. voltage	U _m	AC/DC 250	V
Relay contact circuits (KL3...KL5, KL6 and KL7)			
Switching voltage		DC 30	V
Switching current		2	A
or			
Switching voltage		AC 125	V
Switching current		0,5	A
Max. Max. voltage	U _m	AC/DC 125	V

5.2 Thermal data

Ambient temperature range	T _{ambient}	-10 to +70°C
Process temperature range	T _{process}	-20 to +90°C
Housing surface temperature	T _{max}	+135°C

5.3 Mechanical data

Housing material	Stainless steel
Sensor surface	Plastic (optional ceramic for abrasive media)
Protection class	IP 65
Weight	1.3 kg
Cable entries	M16
Connection	Screw terminals

5.4 Electrostatic discharge

Electrostatic sensitive modules can be destroyed by voltages that are far below the threshold of human perception if you touch a component or electrical connections of a module without being electrostatically discharged. The damage that occurs to a module due to an overvoltage cannot usually be detected immediately, but only becomes noticeable after a long period of operation. When handling the microwave sensor, observe the necessary safety measures against electrostatic discharge (ESD) in accordance with EN 61340-5-1 and EN 61340-5-2.

5.5 Housing dimensions with adapter

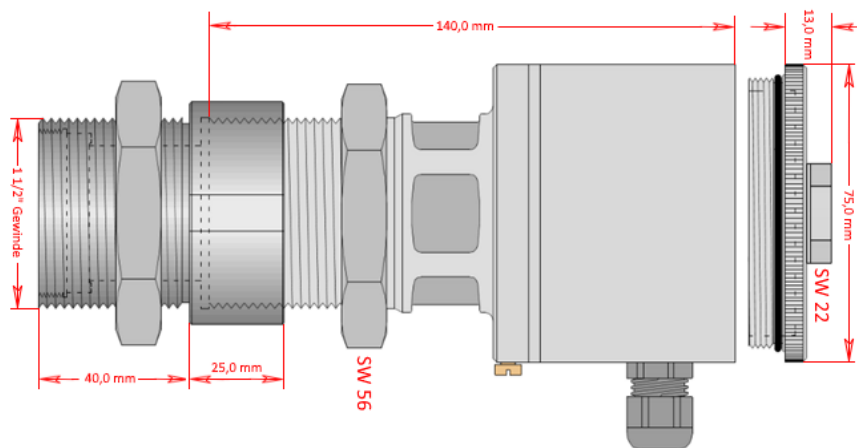


Fig. 2 Microwave sensor

5.6 Adapter AD510 for measurement in zone 20

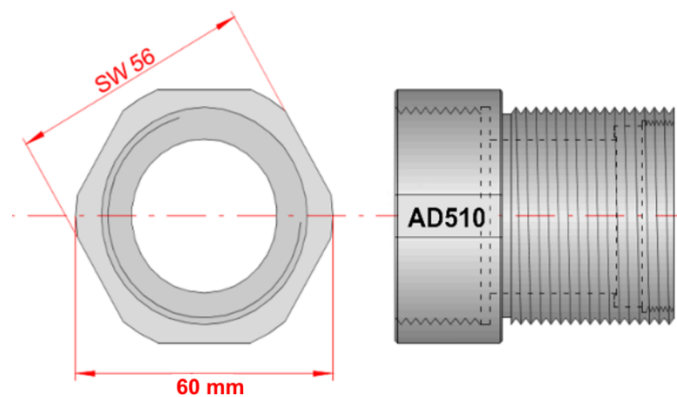


Fig. 3 Adapter AD510

5.7 Earthing via PE protective conductor

For the required potential equalization, there is a 4 mm brass screw with toothed washer for the connection on the cylindrical housing. This ensures safe electrical conductivity with high corrosion resistance for the connection of the protective conductor. A ring cable lug supplied enables problem-free connection for a cable cross-section of at least 4 mm². This must be observed for installation in hazardous areas



Fig. 4 Protective conductor

5.8 Block diagrams with terminal assignment

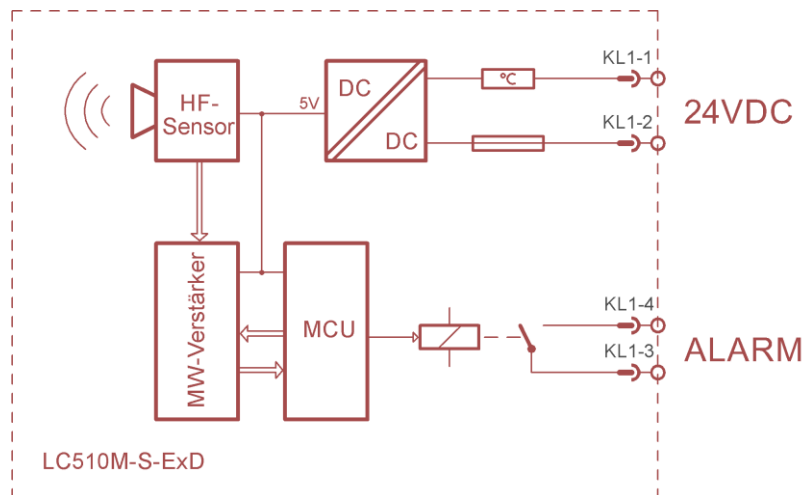


Fig. 5 Microwave sender LC510M-S-

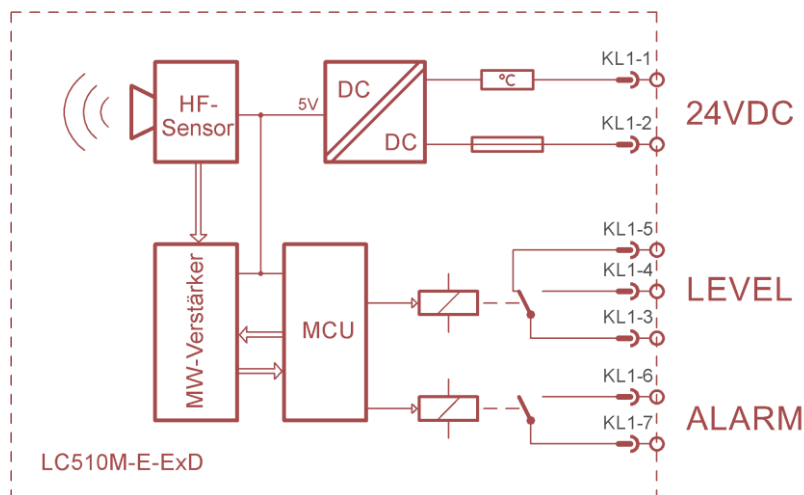


Fig. 6 receiver
LC510M-E-ExD

5.9 Nameplates



Fig. 7 Type plates of the microwave sensors for zone 20

5.10 Screw cap of the sensor housing

The ATEX standard for dust explosion protection requires that the housing of the microwave sensor must not be opened by hand. For this purpose, the housing cover has been fitted with a hexagon for a wrench size of 22 mm (SW22) so that it can be closed with a torque of 8 ... 10 Nm.

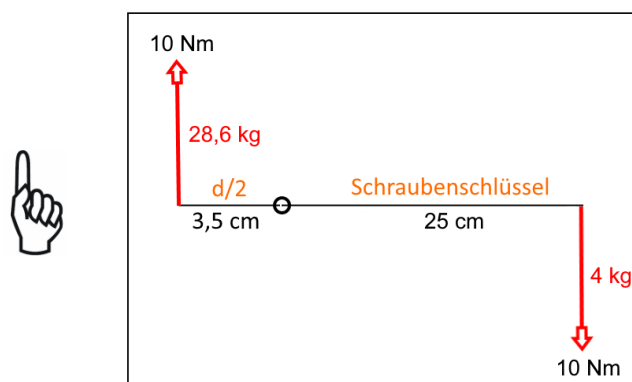


Fig. 8 Minimum torque with a wrench

5.11 Mounting accessories

Weld-in adapter (ESA):

ESA_Type 1:	22,5mm length	Material: Steel
ESA_Type 2:	22,5mm length	Material: Stainless steel V4A
ESA_Type 3:	48.0mm length	Material: Stainless steel V4A
ESA_Type 4:	angled 45°	Material: steel

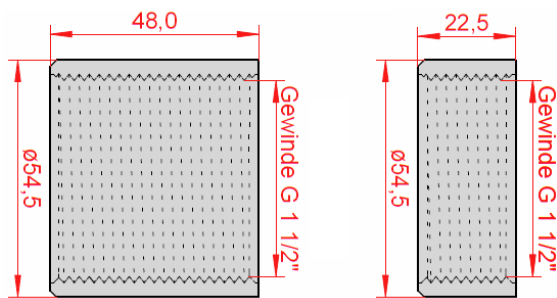


Fig. 9 Dimensions of the
Cylinder sleeve

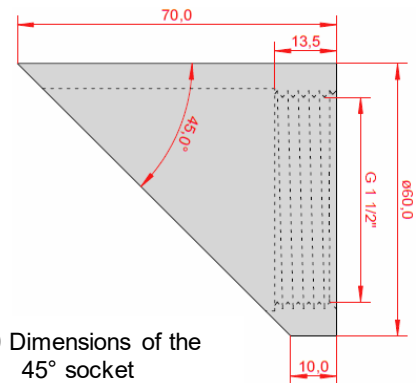


Fig. 10 Dimensions of the
45° socket

Type 1-3: This mounting should be favored when measuring microwave-permeable or microwave-impermeable material with higher velocities.

Type 4: This mounting should be favored when measuring microwave-impermeable material at low speeds.

Type 5: Adapter with mounting plate made of stainless steel (V2A)

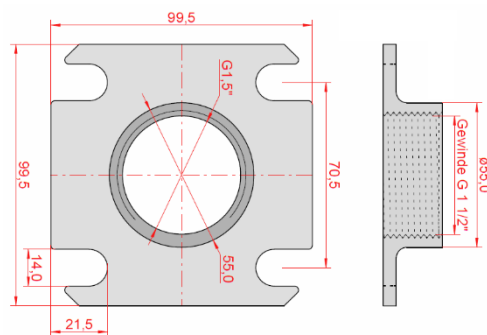


Fig. 11 Dimensions of the adapter

The material of the pipe or shaft must be made of microwave-permeable material. If this is not the case, an artificial measuring chamber can be created by completely encasing the sensor area with a microwave-impermeable material, for example a metal sheet or metal foil.

6 Assembly instructions

The sensors are installed in a stainless steel housing. There is an external thread on this housing through which the sensors can be screwed into a socket and fixed with a lock nut.

7 Parameterization of the microwave sensors

All settings in the microwave sensors are made using rotary switches, two buttons and potentiometers.

Feedback for each parameter is provided by means of a multi-colored bar graph display.

All operating elements are accessible by unscrewing the housing cover.

To prevent damage to the appliance electronics, we advise against removing the inner cover. Unauthorized tampering with the appliance will invalidate the operating permit and warranty.

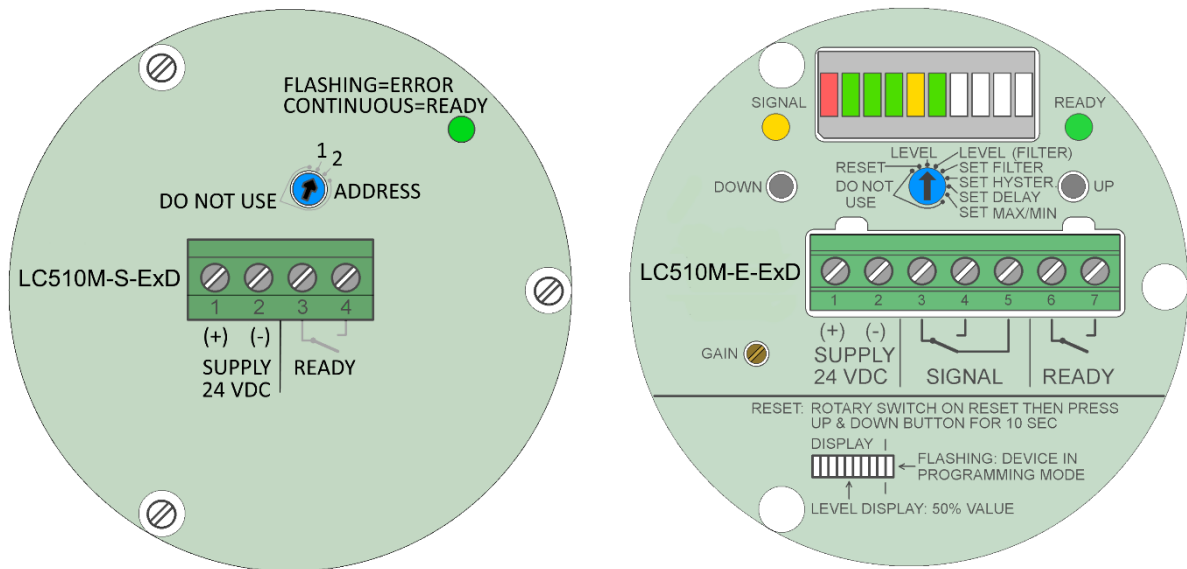


Fig. 12 Illustration of all operating and display elements of the MW transmitter and MW receiver

Operating and display elements:

Bar graph:	The bar graph is used for the analog display of various parameters, such as the field strength or of the material flow.	
Output LED:	This LED indicates the status of the signal relay.	
Operating LED:	The microwave sensors are equipped with self-monitoring (status indicated by READY LED).	
Rotary switch:	Reset:	Reset settings
	Level:	Field strength in sensor mode
	Level (filter):	Averaged filter value of the field strength
	SET Filter:	Setting the filter time
	SET Hysteresis:	Switching hysteresis of the signal relay
	SET Delay:	Switching delay of the signal relay
	SET MAX/MIN:	Limit value setting for the signal relay
Down & Up button:	The buttons are used to set the selected parameter.	
Level controller:	In operating mode, the field strength is displayed on the bargraph. Adjustment is carried out using the level control (gain).	

The setting of the microwave sensors is explained below. The rotary switch for function selection and the buttons for changing the setting are required for this. The bar display and the LEDs provide visual support.

Reset all settings:

Step_1: Set the rotary switch to RESET.

Step_2: The right-hand green LED of the bar graph display and the READY LED flash to indicate this mode.

Step_3: For a RESET, both buttons (Up and Down) must be pressed for 10 seconds. As an acknowledgement, the first orange bar flashes on the bar graph display, followed by the remaining bars. As soon as all bars are involved, the parameters are reset to the default values.



After a RESET, all settings must be made again.

Level / current field strength in sensor mode:

Step_1: Set the rotary switch to Level.

Step_2: The flow rate must correspond to the set flow rate. The amplification (field strength) is set using the level control.




Fig. 13 Representation of the current field

Step_3: Finally, the flow rate should be changed in order to display the field strength on the bar graph display.



The switching threshold for the signal contact is shown on the bar graph display with the 5th bar shown in yellow.

Level (filter) / average value of the field strength in sensor mode:

Step_1: Set the rotary switch to Level (filter).

Step_2: This is the operating mode with the current, averaged field strength.
The flow rate must be equal to the set flow rate for MIN/MAX monitoring.

Step_3: The field strength is set using the level control.
MIN monitoring: Field strength should correspond to a minimum of 6 segments
MAX monitoring: Field strength should correspond to a maximum of 4 segments




Fig. 14 MIN monitoring




Fig. 15 MAX monitoring

Step_4: The flow rate must be reduced for MIN monitoring. The switching process must take place when the flow rate falls below the 5th element (yellow LED).



The switching point is indicated by the 5th segment of the bargraph (yellow LED). During commissioning, ensure that a maximum of 7 segments of the bar graph display are activated. The end of the measuring range is symbolized by the right-hand red LED on the bar graph.

Filter time setting:

Step_1: Set the rotary switch to Filter.

Step_2: The 9 time settings are made using the Up and Down buttons.

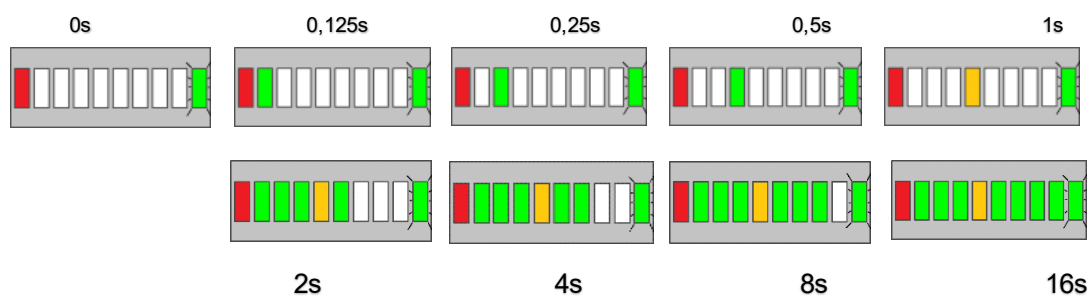


Fig. 16 Filter time display

Hysteresis

Step_1: Set the rotary switch to hysteresis.

Step_2: The hysteresis is changed using the Up and Down buttons. The switching threshold is symbolically located in the middle of the display. The size of the set value is shown by the green LEDs around the symbolic switching threshold.

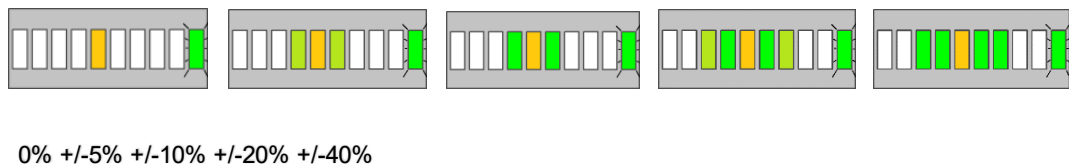


Fig. 17 Hysteresis display



If the hysteresis selected is too small, the signal contact may switch continuously. If the hysteresis is set too high, a change in material flow may no longer be detected.

Delay // Switching delay for the signal relay

Step_1: Set the rotary switch to Delay.

Step_2: The time delay is set using the Up and Down buttons.

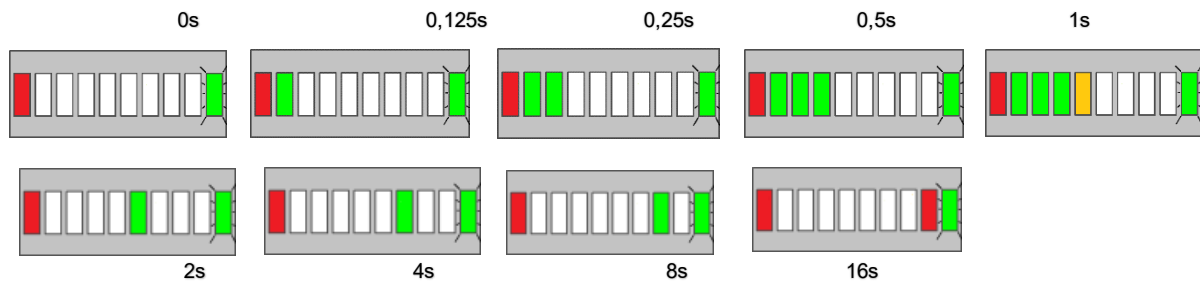


Fig. 18 Switching delay for signal relay



The selection of the optimum switching delay depends on the respective process and should be adapted to it. If the time selected is too short, a pulsating material flow may cause the relay to switch frequently. If the time selected is too long, short interruptions in the material flow may not be detected.

MAX/MIN selection for signal

- Step_1: Set the rotary switch to MAX/MIN.
- Step_2: The relay contact opens or closes according to its setting.
- Step_3: The new function is selected using the Up and Down buttons.







Condition / Selection	Bar graph display	Switching threshold	Signal LED	Signal contact	Operating LED	Ready contact
min. Value		undercut			 permanent	
		exceeded			 permanent	
max. value		undercut			 permanent	
		exceeded			 permanent	
Error case resp. Malfunction	not applicable	not relevant	undefined	undefined	 flashing	
No auxiliary energy						

Fig. 19 Status table



In the event of an error, the signal relay does not necessarily drop out and the signal LED does not expire.

The READY contact of the relay, which is operated according to the closed-circuit principle, signals a maintenance requirement. The relay contact, which is closed in the good state, offers the option of series connection with other contacts of other devices and thus collective alarm monitoring.



The READY relay is equipped with a switch-on delay of 1 second.